



Warning:

This product must be installed by personnel who are familiar with its structure and related hazards, in accordance with the installation specifications. This product is suitable for indoor installation.




Product style diagram


Steps of installation

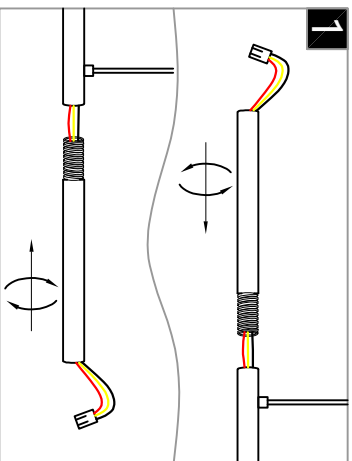


Pass the lamp body wire through the short tube, and then tighten the short tube onto the lamp body.

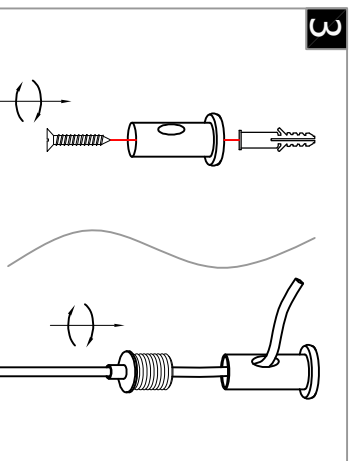


Measure the distance between the wires with a tape measure, mark the ceiling, fix the T-shaped cylinder at the marked position on the ceiling, then pass the wires of the fixing device through the holes on the side of the T-shaped cylinder, and finally tighten the fixing device. (by pressing the protrusion of the fixing device to adjust the length of the hanging wire).

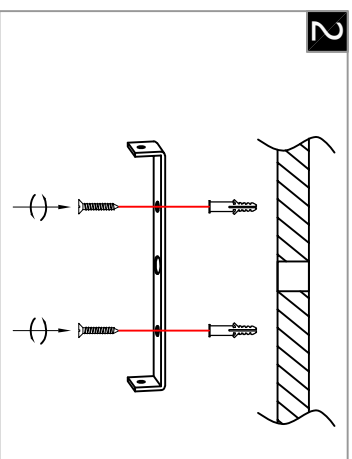

Fix the mounting plate to the ceiling.

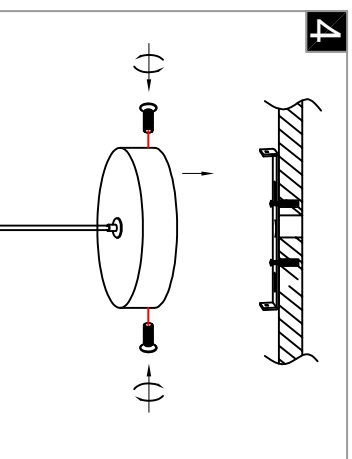

Align the holes on the side of the disc with the screw holes on the side of the mounting plate, and tighten the screws.

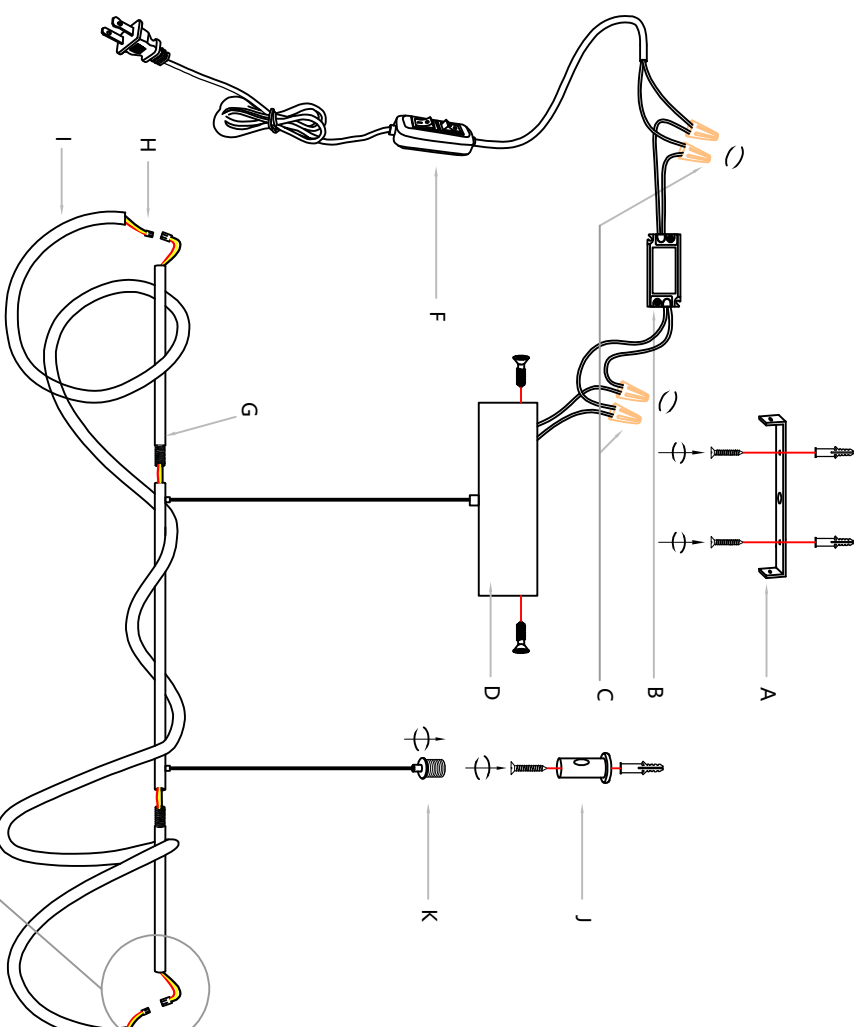

First, pass the lamp body wire (H) through the short tube (E), and then tighten the short tube (E) onto the lamp body. Next, wrap the acrylic hose (I) around the lamp body, and connect the wire (H) to the wire of the acrylic hose (I). Then, fix the mounting plate (A) to the ceiling. Next, measure the distance between the wires with a tape measure, mark the ceiling position, fix the T-shaped cylinder (J) at the marked position on the ceiling, then pass the wires of the fixing device (K) through the holes on the side of the T-shaped cylinder (J), and finally tighten the fixing device (K) (by pressing the protrusion of the fixing device to adjust the length of the hanging wire). Then, use the quick connector cap (C) to connect the positive and negative wires of the power driver (B) to the wires inside the disc (D). Next, use the quick connector cap (C) to connect the switch wire (F) to the neutral and live wires of the power driver (B). Then, align the holes on the side of the disc (D) with the screw holes on the side of the mounting plate (A), and tighten the screws.